

IP-MDC-5400

Mini Dome Day/Night, Vandal Proof, Network Camera



INCORPORATED


Sophisticated Security and Surveillance Systems

Features

- ✓ Full frame rate up to D1 30fps @ 720x480 resolution
- ✓ Compatible with MPEG4 standard
- ✓ Superior image quality (540 TV Lines)
- ✓ Combines superior imaging with a vandal-proof housing
- ✓ Rugged, compact design for indoor/outdoor applications
- ✓ Built-in network interface (10Base-T/100Base-T) for remote monitoring by PC
- ✓ Interface protocol: TCP/IP, HTTP, UDP, DHCP, RTP, RTSP, SMTP, DDNS
- ✓ Quick and easy set up with user friendly GUI
- ✓ Sophisticated motion detection
- ✓ Supports pre & post alarm record in client PC
- ✓ Notify events via e-mail & SMS



Description

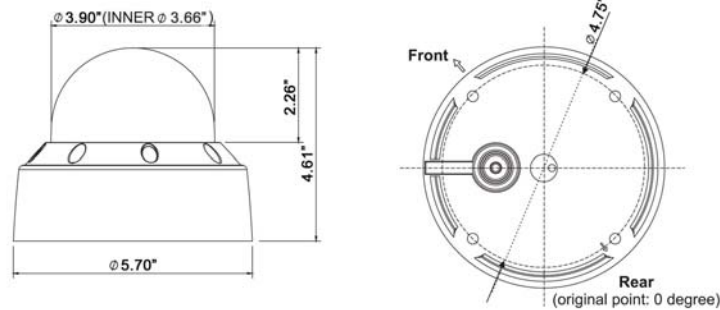

Specifications

Video		General	
Signal Format	NTSC	Image Sensor	1/3" Sony Super-HAD Color CCD
Resolution	540 TV Lines (Color)	Total Pixels	811 (H) x 508 (V)
Min. Illumination	0.3 Lux (Color), 0.002 Lux (Sens-up)	Scanning System	2:1 interlace
Video Output	1.0 Vp-p, 75 ohm composite	Sync System	Internal / Line lock
S/N Ratio	50 dB (AGC off)	Operating Temp.	14°F to 122°F
Network		Operating Humidity	0-96% (non-condensing)
Display Resolutions	D1 720x480, 640x480, 320x240, 160x120	Function	
Maximum Frame Rates	30 fps @ 720x480	Auto Exposure	Auto / Manual Shutter / Flickerless / AGC
Video Compression Format	MPEG-4 Part2 (ISO/IEC 14496-2), Profile: SP and ASP	Electronic Shutter	1/60 ~ 1/120,000 sec
Audio Compression Format, I/O Terminal	G.726 (ADPCM), Full duplex, 16/8 kbps, 3.5mm Mic In x1 and Speaker Out x1	White Balance	ATW / AWC / Manual
Alarm and event Management	Built-In motion detection, Adjustable sensitivity and dwelling time	AGC	Off / Low / Middle / High
Protocols	TCP/IP, UDP, HTTP, RTP, RTSP, DHCP, SMTP, DDNS	BLC	Off / Low / Middle / High
Ethernet	10Base-T/100Base-T (RJ-45)	Auto Iris Control	Manual / DC / Video
Pre/Post Event	Max. 180 sec	Sens-up	Off / Auto (x2 ~ x128)
Image Setting	Color, Brightness, Contrast	Mirror	On / Off
Event Recording / Email Notification / Remote Upgrade / Remote Set-up/viewer / / Multicasting Capability / Bandwith Control / Search by Alarm, Event, Time		Day & Night	Auto / Color / B/W
Minimum Operation System	Microsoft Windows 2000/XP, Intel Pentium III 500MHz or higher, 256MB or more	DNR	Off / Low / Middle / High
Web Browser	Microsoft Internet Explorer Version 6.0	Display Title	On / Off
		Privacy Zone	On / Off (4 point)
		Preset	Default / Save / End
		Power	
		Power Source	DC12V
		Power Consumption	4W
		Mechanical	
		Power Input	2-Pin Wire
		Video Output	BNC Connector
		Housing	Heavy duty die-cast aluminum water & weatherproof, Weatherproof IP66
		Weight	2.87 lbs